



200 MHz Low-Noise Voltage Amplifier

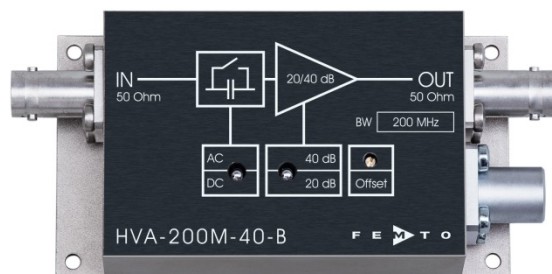

Features	<ul style="list-style-type: none"> • Switchable Gain 20/40 dB (x10 / x100) • Bandwidth DC ... 200 MHz • Low Input Noise of 1.2 nV/√Hz • Switchable AC/DC Coupling 	
Applications	<ul style="list-style-type: none"> • Oscilloscope and Transient Recorder Preamplifier • Photomultiplier and Microchannel Plate Amplifier • Signal Booster for Optical Receivers and Current Amplifiers • Time-Resolved Pulse and Transient Measurements 	
Specifications	<p>Test Conditions</p> <p>Gain</p> <p>Frequency Response</p> <p>Input</p> <p>Output</p> <p>Power Supply</p> <p>Case</p>	<p>$V_s = \pm 15\text{ V}$, $T_a = 25^\circ\text{C}$</p> <p>20/40 dB switchable ± 0.2 dB</p> <p>DC/1 kHz switchable 200 MHz 1.8 ns</p> <p>50 Ω 12 pF 1.2 nV/√Hz (@ 50 MHz, 40 dB gain) 3.5 nV/√Hz (@ 50 MHz, 20 dB gain) 150 μV peak-peak (@ 40 dB gain) 400 μV peak-peak (@ 20 dB gain) 20 μA 500 μV typ. 1 μV/°C</p> <p>50 Ω (terminate with 50 Ω load for best performance) ± 1 V (@ 50 Ω load, for linear amplification) 60 mA ± 100 mV 500 V/μs (@ 20 dB, 50 Ω load) 1,000 V/μs (@ 40 dB, 50 Ω load)</p> <p>± 15 V ± 70 mA typ. (depends on operating conditions, recommended power supply capability min. ± 150 mA)</p> <p>200 g (0.5 lbs) AlMg4.5Mn, nickel-plated</p>

200 MHz Low-Noise Voltage Amplifier

Specifications (continued) Temperature Range	Storage Temperature Operating Temperature	- 40 ... + 100 °C 0 ... + 60 °C
Absolute Maximum Ratings	Power Supply Voltage Input Voltage	± 20 V ± 5 V
Connectors	Input Output Power Supply	BNC BNC LEMO series 1S, 3-pin fixed socket Pin 1: + 15V Pin 2: - 15V Pin 3: GND



Dimensions	<p style="text-align: center;">all measures in mm unless otherwise noted</p> <p style="text-align: right;">DZ_HVA-200M-40_R2</p>
------------	--

FEMTO Messtechnik GmbH
 Klosterstr. 64
 10179 Berlin · Germany
 Phone: +49 30 280 4711-0
 Fax: +49 30 280 4711-11
 Email: info@femto.de
 www.femto.de

Specifications are subject to change without notice. Information provided herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.

© by FEMTO Messtechnik GmbH · Printed in Germany